


TRF-1 OCH
 1. -2 V
 2000- 0000rpm

Robots , Lockset,
 Toys, Appliances,
 Office equipments.




/DRAWING(mm)

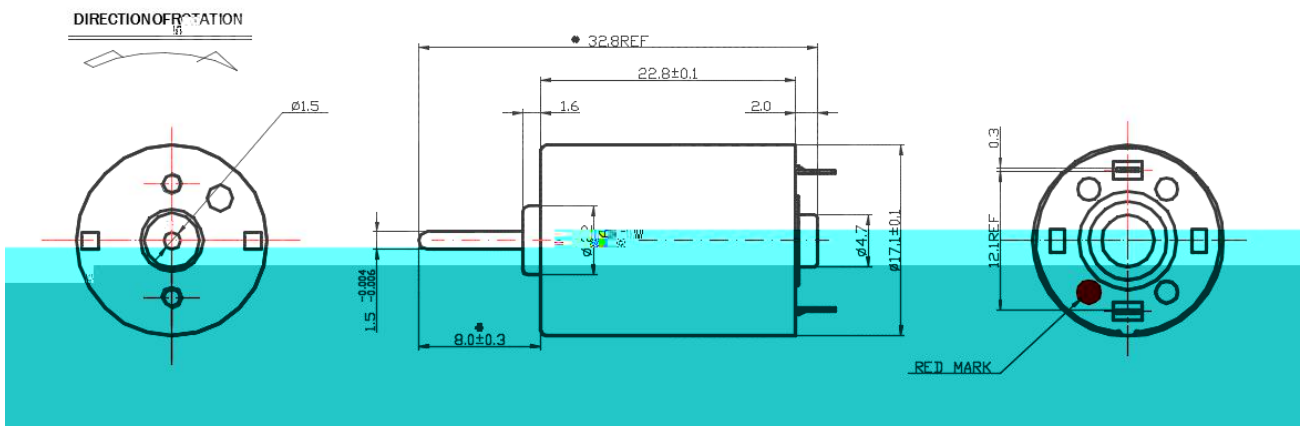

/Motor Data:

Model	Start voltage	Rated voltage	No Load Speed	No Load current	Load	Load Speed	load current	Stall torque	Power
	V	V	rpm	A	g.cm	rpm	A	g.cm	W
TRF-130CH-18115	0.8	3.0	8150	0.075	5.0	6980	0.23	34	0.73
TRF-130CH-13200	1.5	9.0	13500	0.1	10.0	11500	0.35	55	2.4

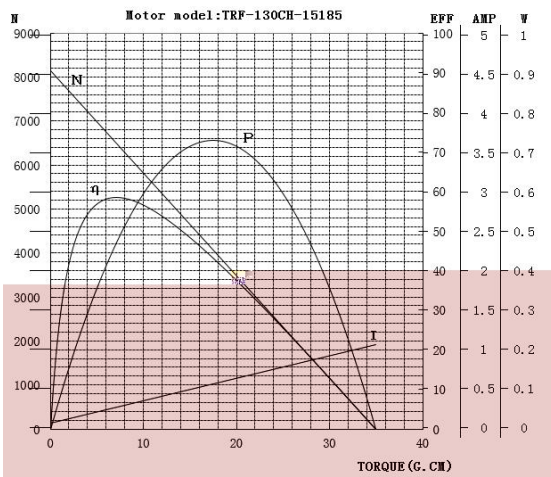

- Remarks
- 1 Ambient temperature 25-30
 - 2 Dimension with * in the drawing can be adjusted according to customer's requirement.
 - 3 Motor can be designed upon customer's requirements on performance, installation, power connection method and motor dimension.

1inch=25.4mm 1mm=0.0394inch
 1g.cm=0.098mN.m 1mN.m=10.2g.cm

